



Abodo®'s Imbue™ products are the result of an advanced thermal modification process for wood, a natural and environmentally friendly technology that profoundly transforms the structure of the timber. This treatment significantly improves the wood's durability and dimensional stability, whilst preserving its natural character. This transformation gives the wood high durability (Class 1), excellent stability and a characteristic warm brown colour.

All our boards have a smooth visible surface and are graded according to defined aesthetic criteria.

When exposed to UV light, the surface of Imbue™ gradually develops a uniform silver-grey patina. This process begins shortly after installation and continues over a period of several months to a few years, depending on the conditions of exposure. To preserve the original colour or achieve a specific shade, a UV-resistant pigmented finish can be applied. A uniform finish limits moisture penetration, reduces the appearance of micro-cracks and ensures a consistent visual appearance over time. Imbue features a natural and elegant grain, which is subtly revealed as it ages.




NO KNOTS




THERMALLY MODIFIED
WOOD



DURABLE



DIMENSIONAL
STABILITY



SUSTAINABLE
PROCEDURE



CLASS 1

Up to 3% of the volume may be of inferior quality.

Any defects permitted on the reverse side, for which there are no size restrictions, are tolerated provided they do not compromise the mechanical properties or the visual appearance of the installed product.

Quality criteria apply upon receipt of the timber and not after ageing.



GRADING BASED ON VISIBLE SIDE

QUALITY: **CLASS A1**

VISIBLE FACE

BACK FACE

RESIN POCKET




≤ 20 mm long
≤ 5 mm wide
Pocket depth: 2 mm max

STRAPPING MARK



BEAD MARK

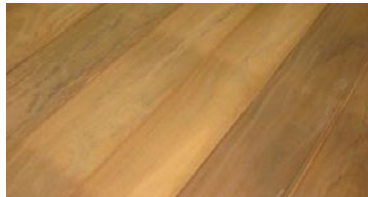

CRACK AT THE ENDS



≤ 3 cm

CRACK IN THE BOARD (NOT THROUGH)



≤ 5 cm

BREAKAGE



BREAKAGE IN THE GROOVES



GRADING BASED ON VISIBLE SIDE

QUALITY: **CLASS A1**

VISIBLE FACE

BACK FACE

CUTTING DEFECTS
AT THE ENDS



PLANING DEFECTS



VARIATIONS
IN COLOUR OR
PATTERN WITHIN
THE BOARD




CROOK



≤ 5 mm over 2 m

BOW



≤ 10 mm over 2 m

TWIST



≤ 10 mm over 2 m