



MOSO® Bamboo N-durance® products are the result of an advanced thermal densification process for bamboo, a deep-processing technology that is environmentally friendly and significantly improves the material's durability and stability. This process makes the bamboo extremely durable (Class 1), highly dimensionally stable, and gives it a characteristic natural dark brown colour.

All our boards are sorted by their visible face according to the criteria below.

When exposed to UV light, the surface of MOSO® Bamboo N-durance® gradually develops a uniform silvery-grey patina. This process begins shortly after installation and continues over a period of several months to a few years, depending on the conditions of exposure. To preserve the original dark colour or achieve a specific finish, a UV-resistant pigmented finish can be applied. A regular finish protects against moisture penetration, reduces the appearance of micro-cracks and ensures a consistent visual appearance. MOSO® Bamboo X-treme® has a dense, contemporary look, which is subtly revealed as it ages.




KNOT FREE




THERMALLY TREATED
BAMBOO COMPOSITE




DURABLE



DIMENSIONAL
STABILITY



SUSTAINABLE
PROCEDURE




CLASS 1

Up to 3% of the volume may be of inferior quality.

Any defects permitted on the reverse side, for which there are no size restrictions, are tolerated provided they do not compromise the mechanical properties or the visual appearance of the installed product.

Quality criteria apply upon receipt of the timber and not after ageing.

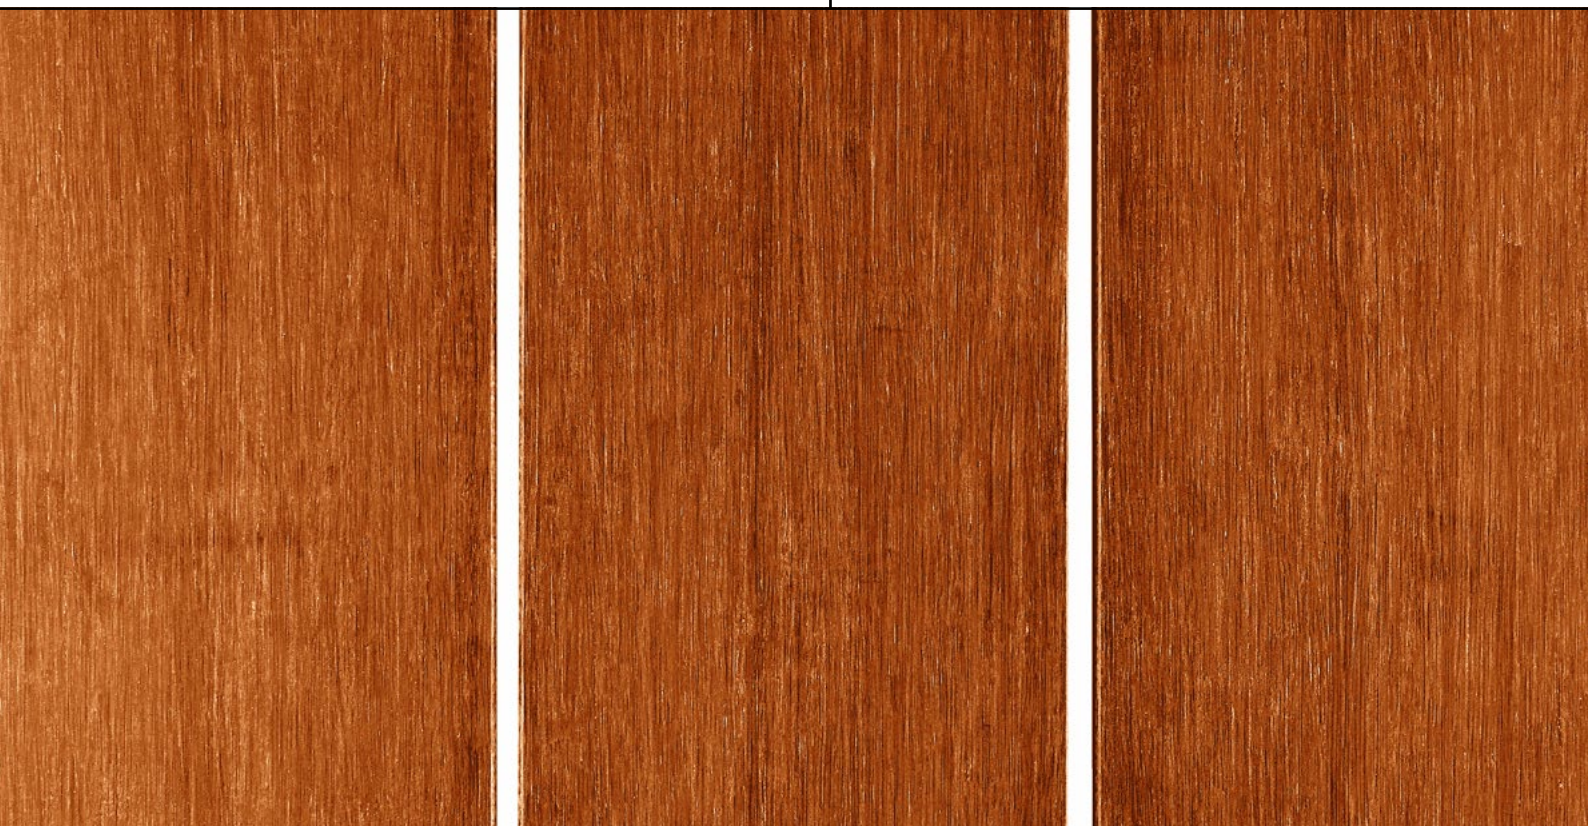

GRADING BASED ON VISIBLE SIDE

VISIBLE FACE

BACK FACE

PLANING
MARKS



SURFACE
MARKS



MARKS
CAUSED BY
A LACK OF
SATURATOR
OR FRICTION
BETWEEN TWO
BOARDS



/

BREAKAGE
/ MATERIAL
TEAR-OUT



CRACK




CROOK



≤ 5 mm over 2 m

BOW



≤ 10 mm over 2 m

TWIST



≤ 10 mm over 2 m